

Title : **Installing Legato Legacy board in Pandora**

For distributors and authorized dealers only

IMPORTANT



: This instruction is intended for skilled technicians only !
Disconnect power cord before disassembling the unit.
Please observe precautions for handling electrostatic sensitive devices !

Tools

:
○ 1,5mm hex socket screwdriver
○ 2,5mm hex socket screwdriver
+ Philips Ph1 screwdriver

1. Power the Pandora off.
Let the power supply discharge before separating the preamplifier- and power supply sections.

Remove the screws as shown.




2. Carefully lift up the rear-end of the top cover assembly.

Hint: It might be helpful to have the DC7 cable plug fitted and pull the rear plate a little backwards. (pull in the plug, not the cable).



3. The front end of the center part of the top plate assembly is supported by two screw-heads which simply fits into two holes in the front assembly.

Carefully slide the top cover assembly back while lifting the rear-end of the top cover assembly.

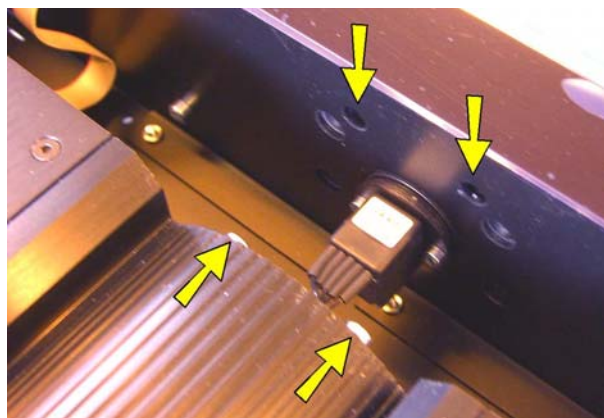

If you have any questions, please contact our service department referring this document service@gryphon-audio.dk

SERVICE NOTE No. 01

LEGATO LEGACY




Date: 2012-05-24

Author: NSM

Page: 2 of 3

4. Remove the screws and washers from the holes labeled "MT1", "MT2", "MT3" and "MT4"
- save the screws for later use.
5. Fit the new **M3 x 28mm** spacers in "MT1", "MT2", "MT3" and "MT4".
6. Fit one of the aluminum bars (54703A) with the two M3x10mm countersunk screws into the spacers on "MT1" and "MT3" as shown on the picture.
7. Remove the screws and washers from the holes labeled "MT5", "MT18", "MT6" and "MT9"
- save the screws for later use.
8. Fit the new **M3 x 35mm** spacers in "MT5", "MT18", "MT6" and "MT9".

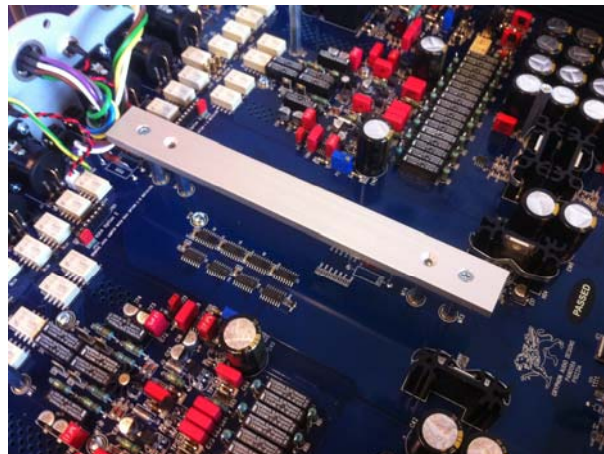

9. Re-position the green/yellow ground wires for the Pandora mainboard as shown:



Left side




Right side

10. Press out the blinding plugs covering the "Phono Input" and "DC4" holes on the rear panel.
11. Remove the outer nut on the Lemo socket of the Legato board phono input and screw the inner nut and the washer backwards on the socket.
12. Carefully insert the Legato Legacy board in the slot in the side panel as shown.



13. Do not slide the boards all the way back yet, but fit the green/yellow ground wires first.

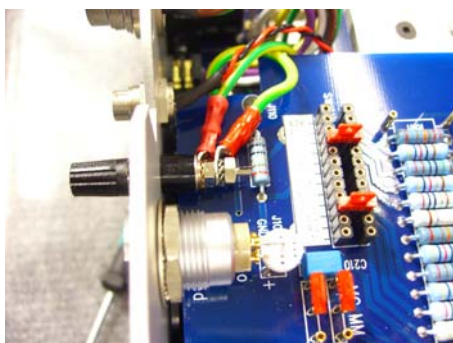

Left side



Right side

14. Carefully slide the boards backwards until the mounting holes "MT9" and "MT10" on the Legato Legacy are directly above the 35mm spacers below.

Observe that the Lemo sockets fits into the rear panel.

Take care not damage the wires for the mainboard while sliding in the Legato Legacy board
- and especially not to damage the wires for the "Green Bias" sockets.

If you have any questions, please contact our service department referring this document service@gryphon-audio.dk

SERVICE NOTE No. 01 LEGATO LEGACY



Date: 2012-05-24
Author: NSM
Page: 3 of 3

15. Mount the screws in the mounting holes "MT9" and "MT10" on both Legato Legacy boards.
(use four of the screws you removed before fitting the spacers).


16. Align the inner nut of the Lemo sockets with the rear panel and fit the outer nut.

17. Insert the gold pins thru the sockets on the Legato Legacy boards
(respectively J105, J106 and J104)

and verify that the pins are properly inserted in the corresponding sockets on
the Pandora main board.

(Pandora left side: into J32, J20 and J25)

(Pandora right side: into J47, J45 and J46)

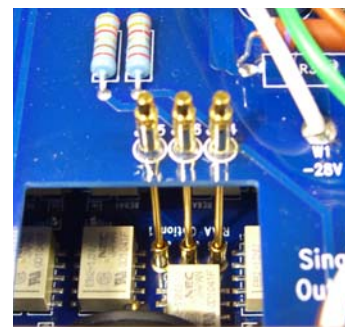

18. Fit the DC4 power supply sockets for the Legato Legacy boards in the rear
panel.


19. Fit the second aluminum bar (54703A) with the two
M3x16mm screws.

20. Check that everything looks fine,
cables are in place and
all nuts for the connectors are properly tightened etc.

21. Select MM or MC and set the desired input impedance
according to the Legato Legacy owners manual.

22. Fit the top cover assembly.

23. Connect the unit and power on.

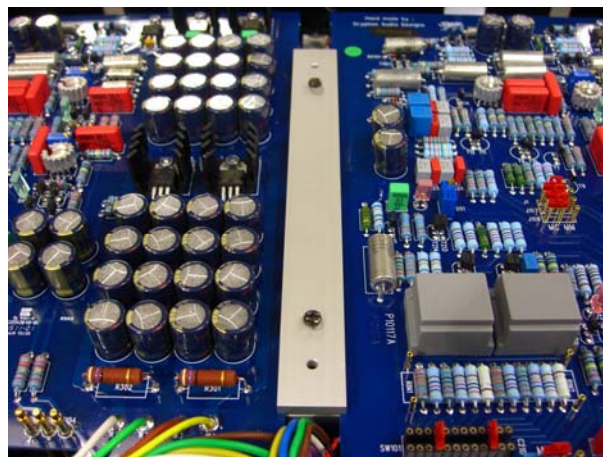

24. **VERY IMPORTANT !**

The Legato Legacy **MUST** be enabled in the MENU of the Pandora.

If not, it will not be possible to select input 6 which is the Legato Legacy input !

Please also refer to the Pandora Owners Manual

25. Test the unit with your record player.

Congratulations, you have now installed a Legato Legacy board in a Pandora.

If you have any questions, please contact our service department referring this document service@gryphon-audio.dk